



FEATURES:

- UL cUL certificate.
- IP65 driver, input voltage 100-277VAC.
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, long lifespan.
- Light is soft and uniform, safe to eyes.
- Instant start, NO flickering, NO humming.
- Green and eco-friendly without mercury.
- Lumen 17700-19200LM
- Lumen Efficacy 118-128 LM/W
- CRI >80

APPLICATION:

City Slow Lane, Narrow Lane, Residential Area, Plaza, Sightseeing Area, Village Road and so on.

ORDERING INFORMATION:

AST-GS02-150WSAT1A1-abcde

AST-GS02-150WSAT2A1-abcde

AST= Company name | **GS02** = Product series, LED Garden Light | **150W** = Rating Power

S= Driver manufacturer, SOSEN | **A** = LED manufacturer, Hongli 2835

T1 = Diffuser light angle type, 60°

T2 = Diffuser light angle type, 90°

A1 = Version number

A1 = Version number

a= Housing Colors, BH= Black, WH= White, BR= Brown or Customized

b= P (Photocell) or Blank (No Photocell)

c= S (Surge Protector) or Blank (No Surge Protector)



d= M (Motion Sensor) or None (No Motion Sensor)

e = CCT, 40=4000K, 45=4500K, 50=5000K, 57=5700K



Illuminance at a Distance

Luminous Intensity Distribution Curve

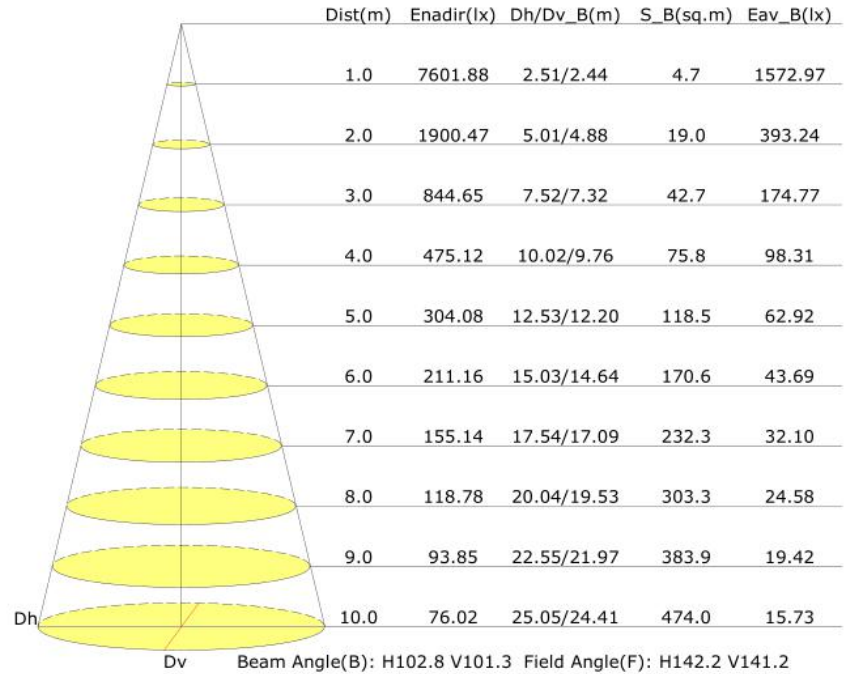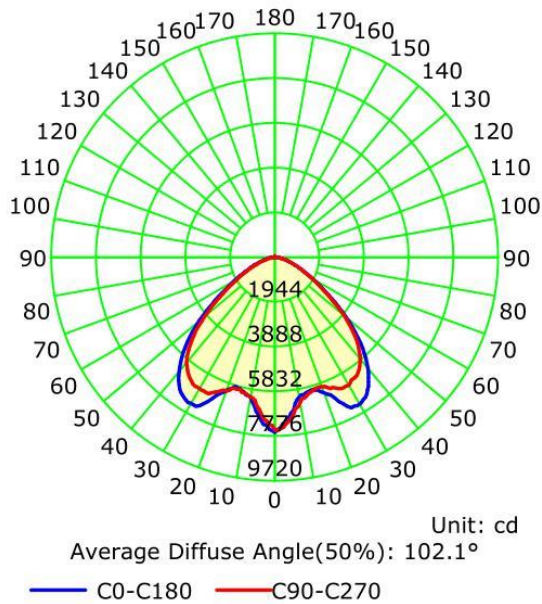

DIMENSIONS:

