

NB-MWP Mini **LED Wall Pack Light**

ebuLite	
ting with Innovations	















DESCRIPTION

The NB-MWP LED Wall Pack is energy-efficiency and features a high performance, and rugged construction with a slim profile design to deliver enhanced performance to outdoor wall-mounted lighting applications. It is designed specifically for outdoor use. The NB-MWP LED Wall Pack is available in 13W and 26W, with color temperatures of 3000K, 4000K and 5000K.

SPECIFICATIONS Product Features



Applications: Commercial, industrial, retail, security lighting, entryways, hospitality and building facades that demand long service life and low maintenance.

Construction

The NB-MWP LED Wall Pack features a battery backup, dusk to dawn photocell and an effortless installation. The NB-MWP has a total harmonic distortion of 15% and its die-cast aluminum housing makes it a durable and corrosion resistant commercial wall pack light.

Voltage

100-277 Volt

Installation & Mounting

Wall Mount

Controls & Dimming

0-10 Volt Dimming Emergency/Photocell Sensor


Warranty


5 Year Limited Warranty

Wattage

13w & 26w

Light Distribution

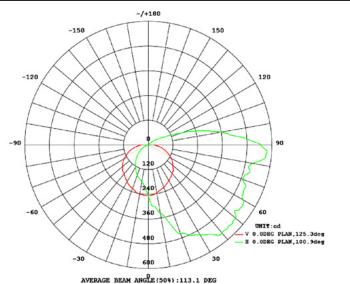

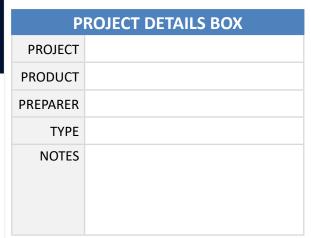










Performace Summary

Input Voltage	100-277V	
Input Frequency	50/60 Hz	
Rated Wattage	13W, 26W	
Efficacy	130 lm/W	
CRI	≥80	
Available CCT	3000К, 4000К, 5000К	
Rated Life (L70)	54,000 hrs	
IP Rating	IP65	
PF	>0.95	
Certifications	ETL, DLC, CE, RoHS	
Working Temp. (°C)	-40°F - 122°F	
LED Light Source	Samsung 2835	



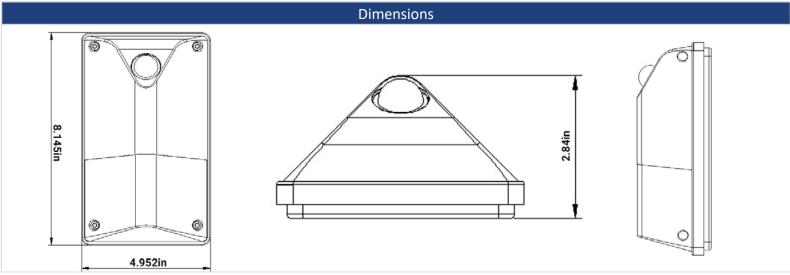

Performance Data

MODEL	WATTAGE	ССТ	LUMEN	EFFICACY (Im/W)	VOLTAGE
NB-MWP-13W	13watt	3000K, 4000K, 5000K	1,690lm	130 lm/W	100-277vac
NB-MWP-26W	26watt	3000K, 4000K, 5000K	3,380lm	130 lm/W	100-277vac

Ordering Format

Sample: NB-MWP-26W-50-PC-EM

SERIES	WATTAGE	ССТ	VOLTAGE	FINISH*
NB-MWP	13W 26W	30 = 3000K 40 = 4000K 50 = 5000K	BLANK = 100-277V	BLK = Black

^{*} contact the Nebulite sales team for turnaround time and pricing on finish color customizations